



15 PERSON 1150kg

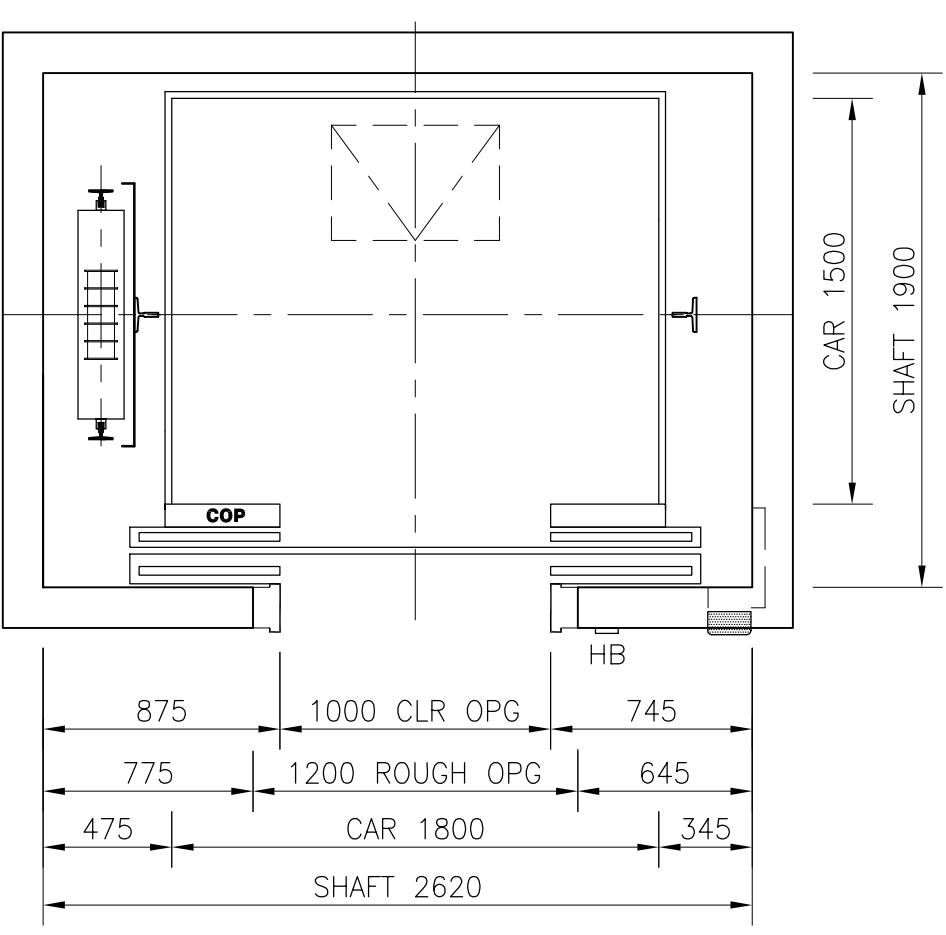


WIDE

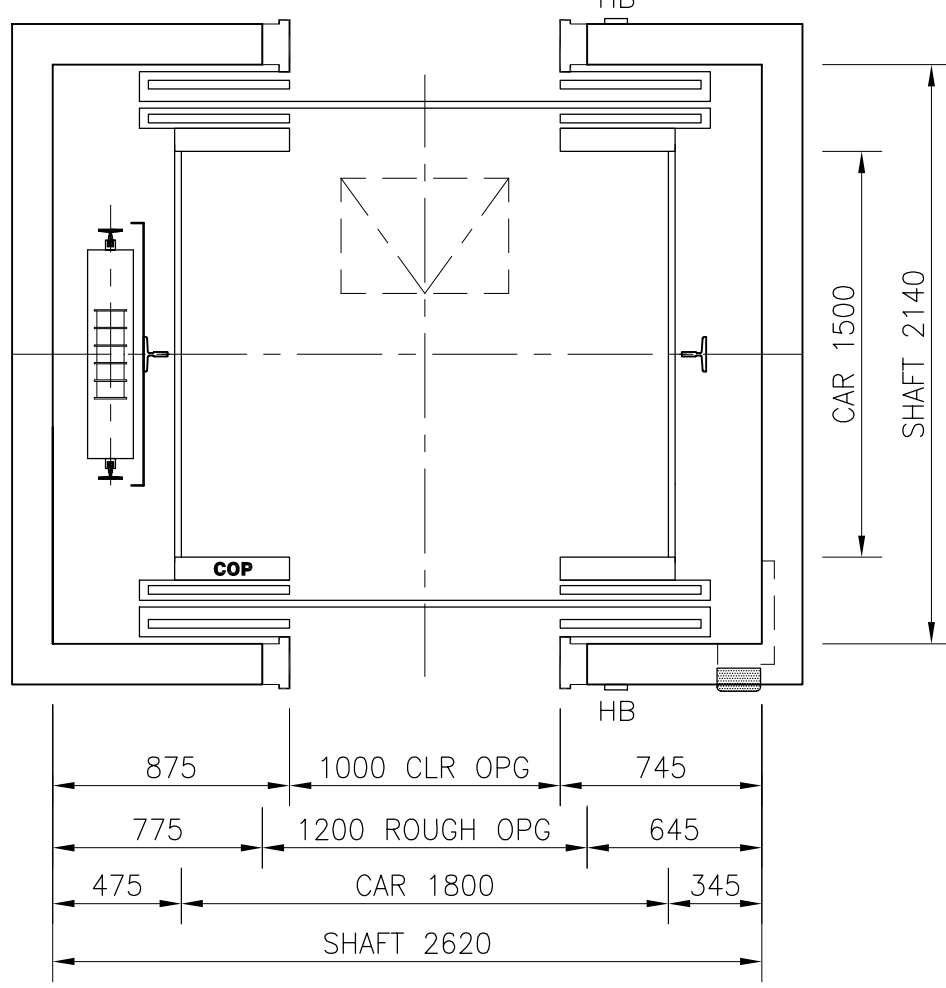


WIDE


17 PERSON 1275kg

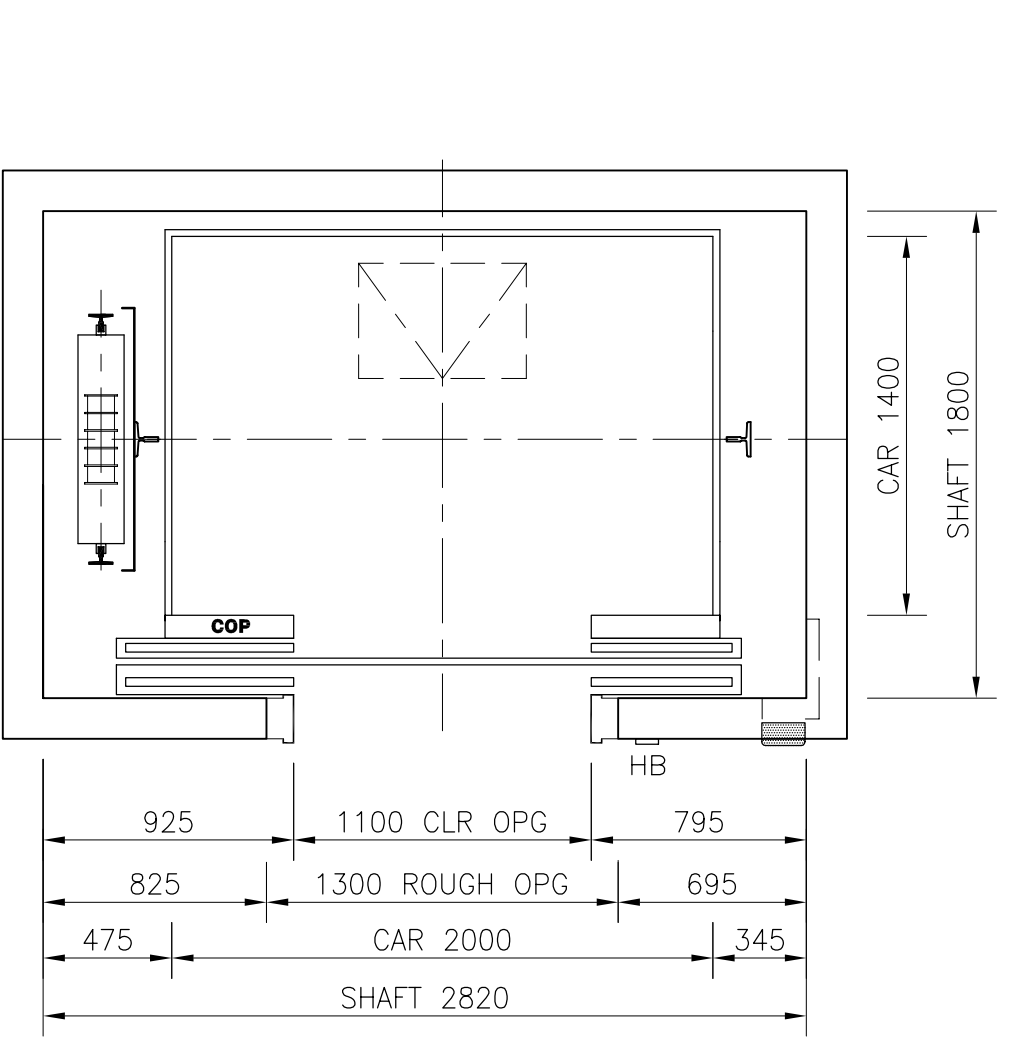


WIDE

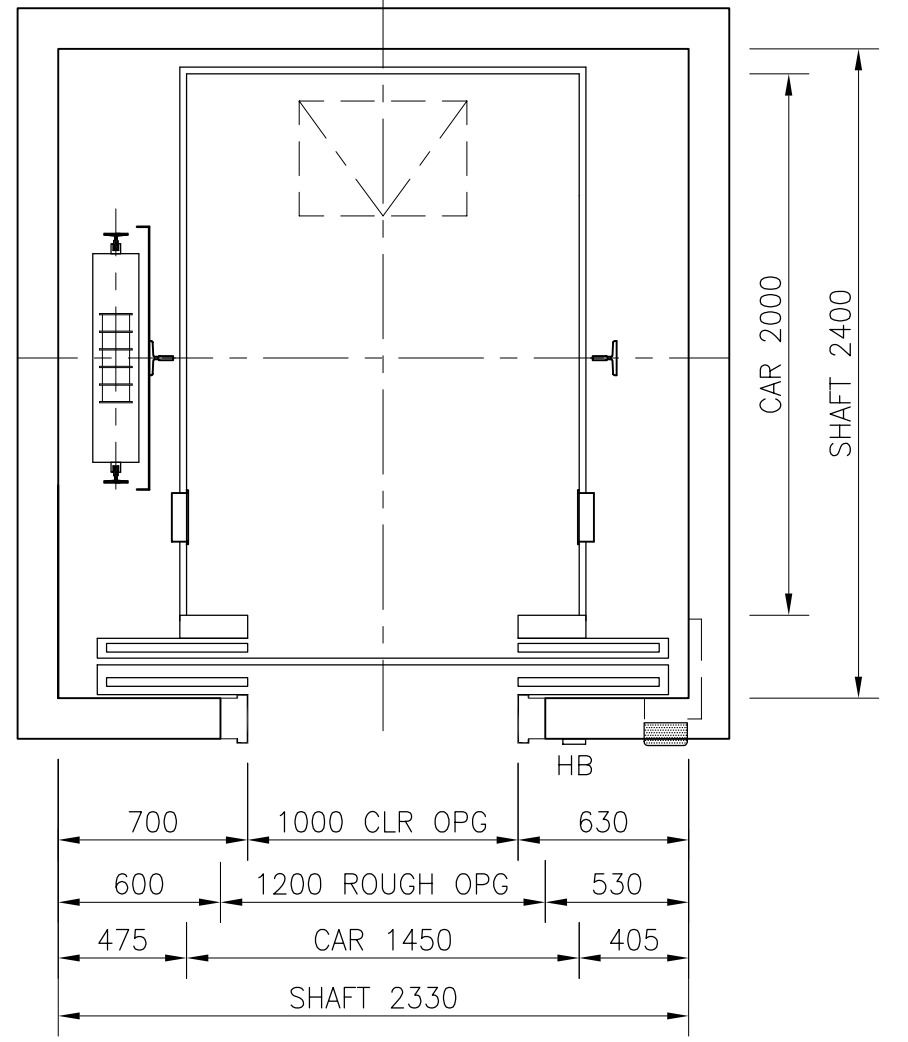

STRETCHER CAPACITY DEEP

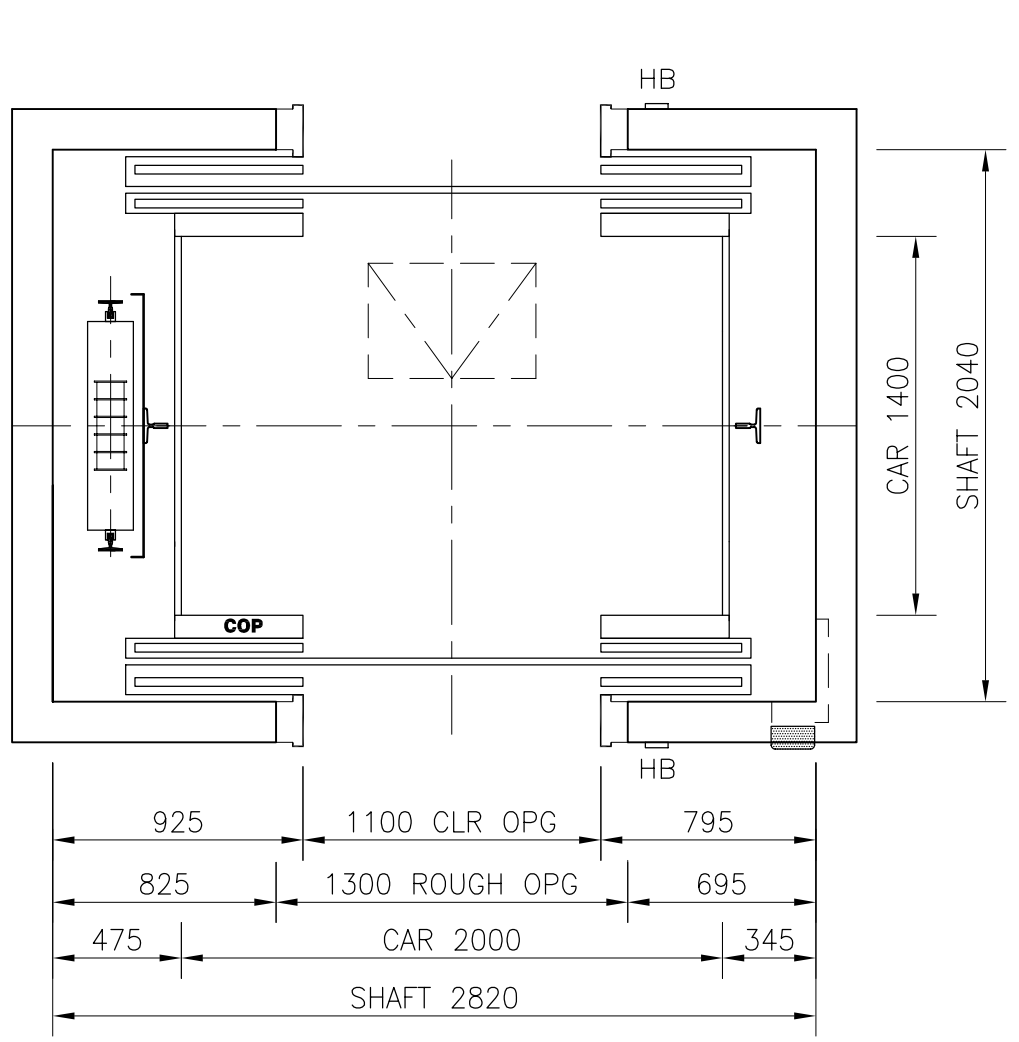


WIDE

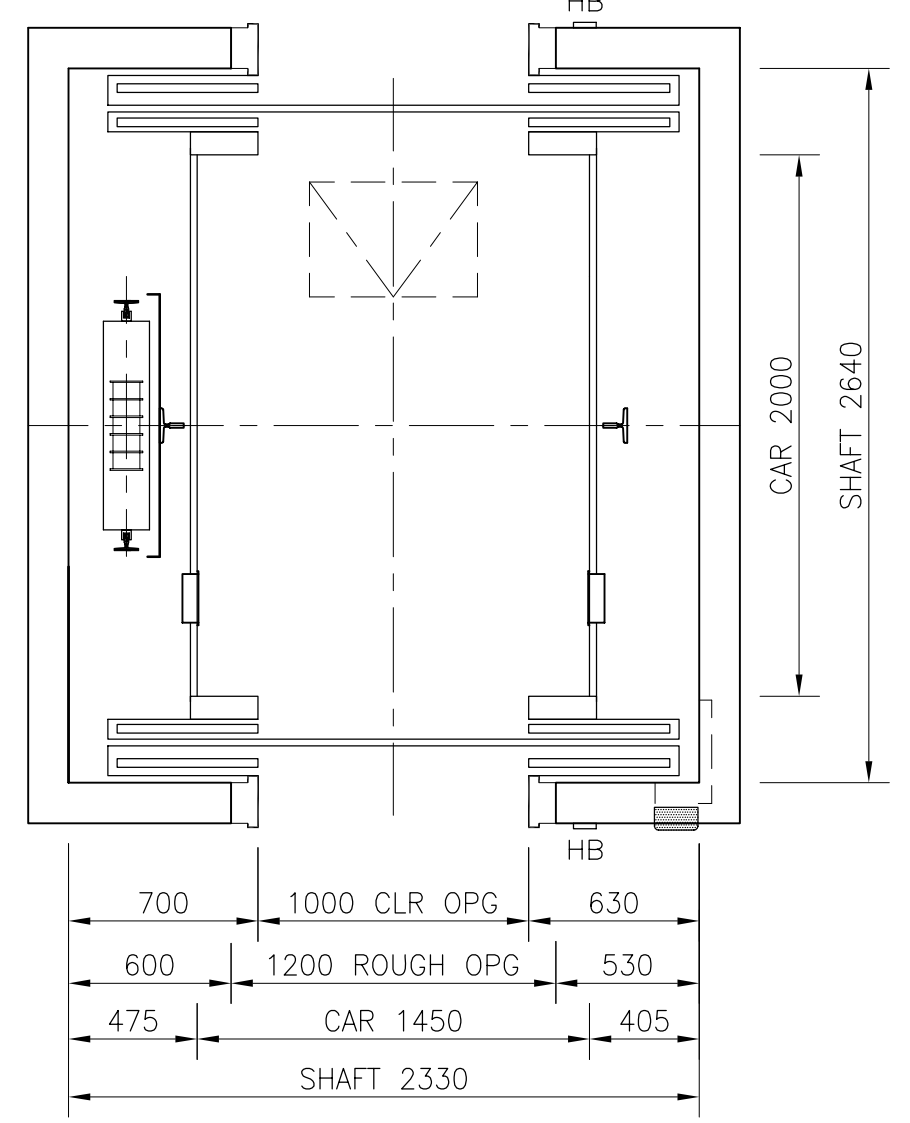


STRETCHER CAPACITY DEEP


18 PERSON 1350kg

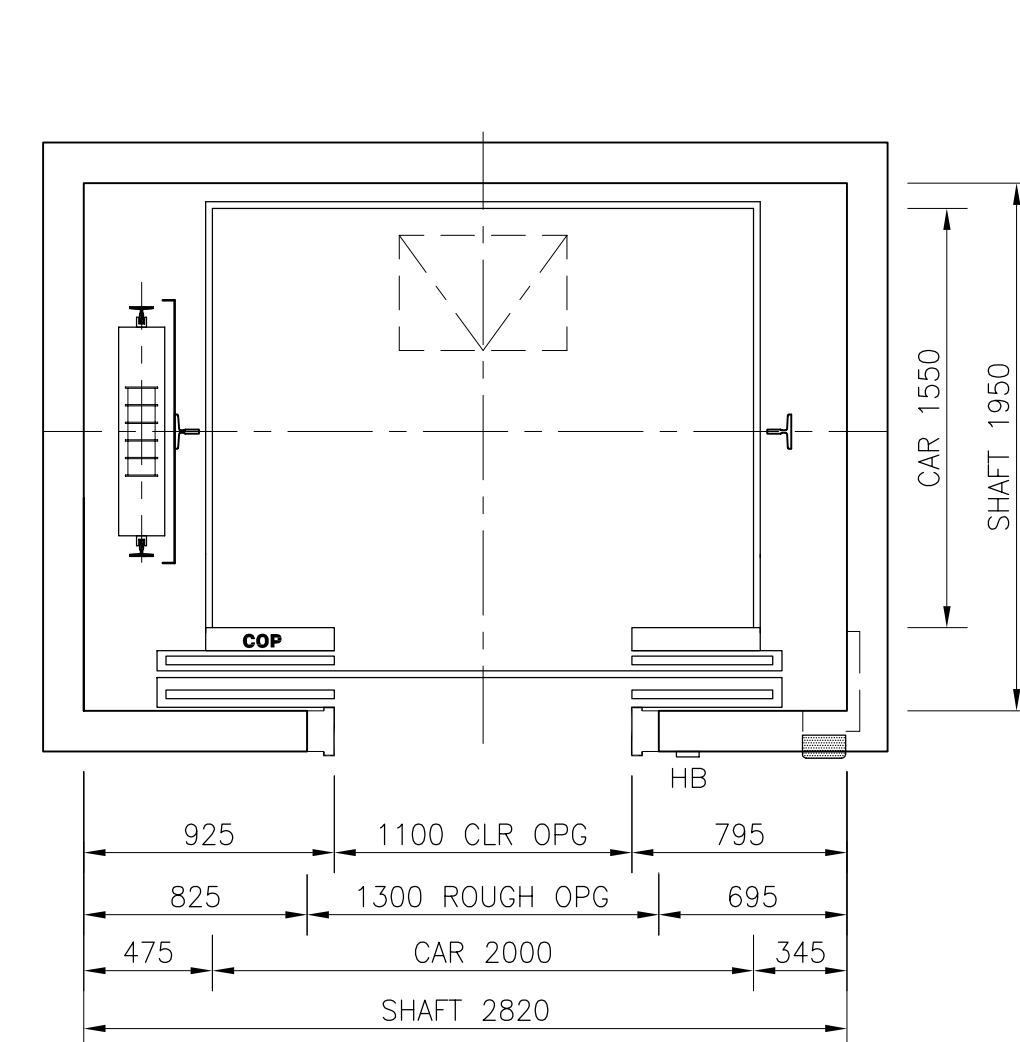


WIDE

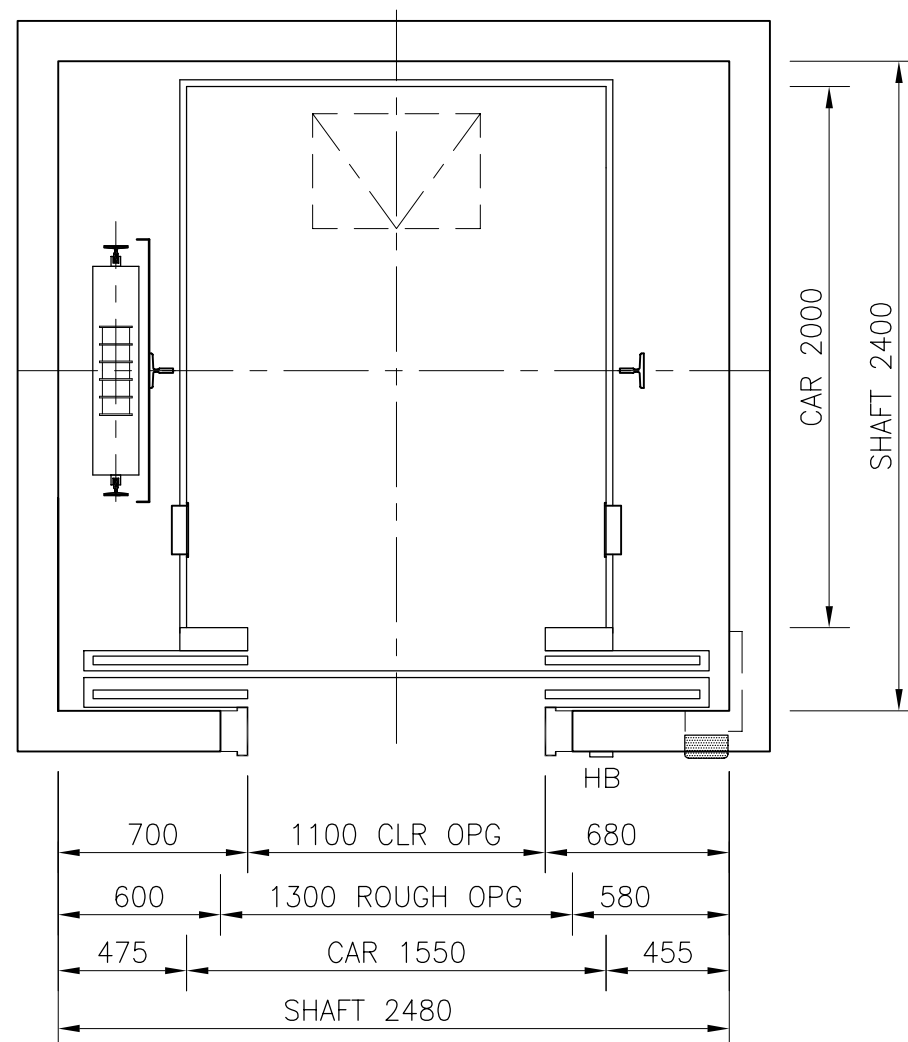

STRETCHER CAPACITY DEEP

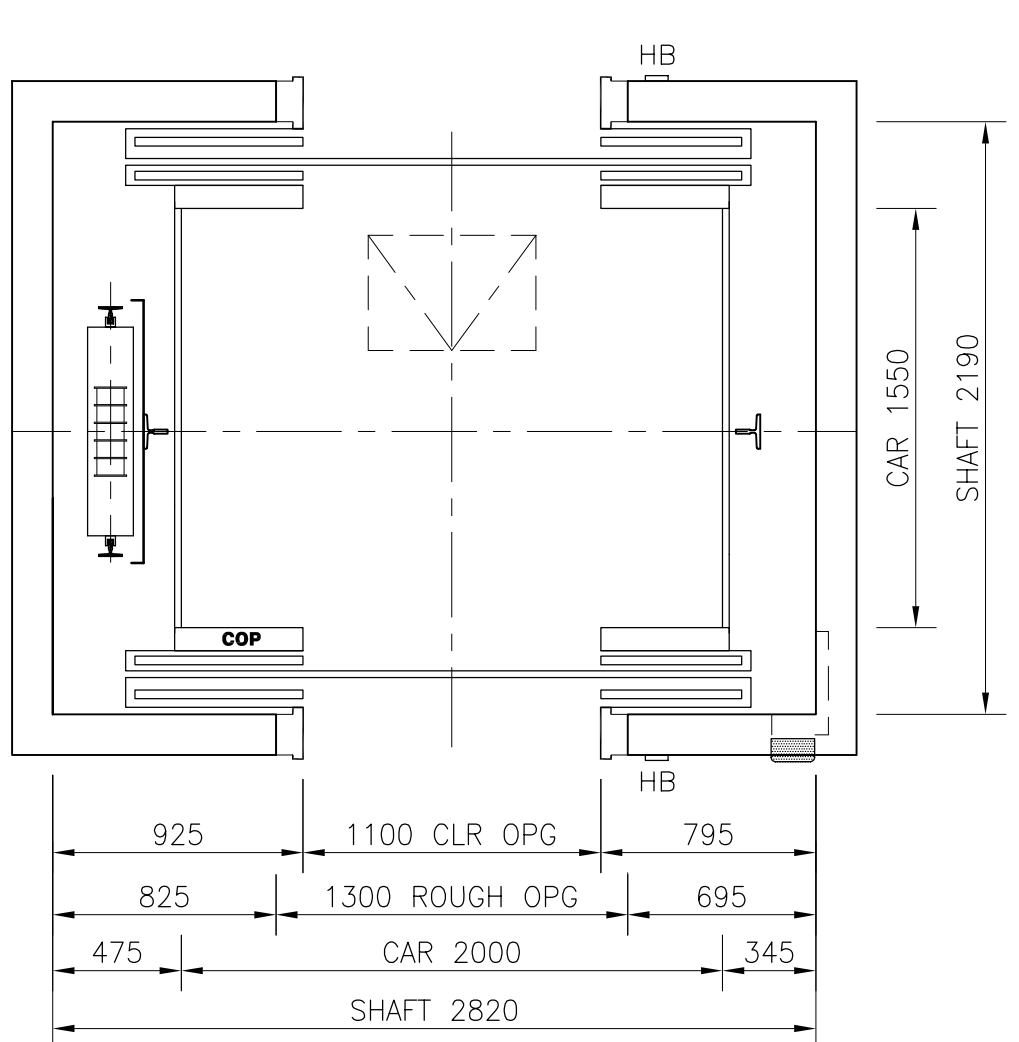


WIDE

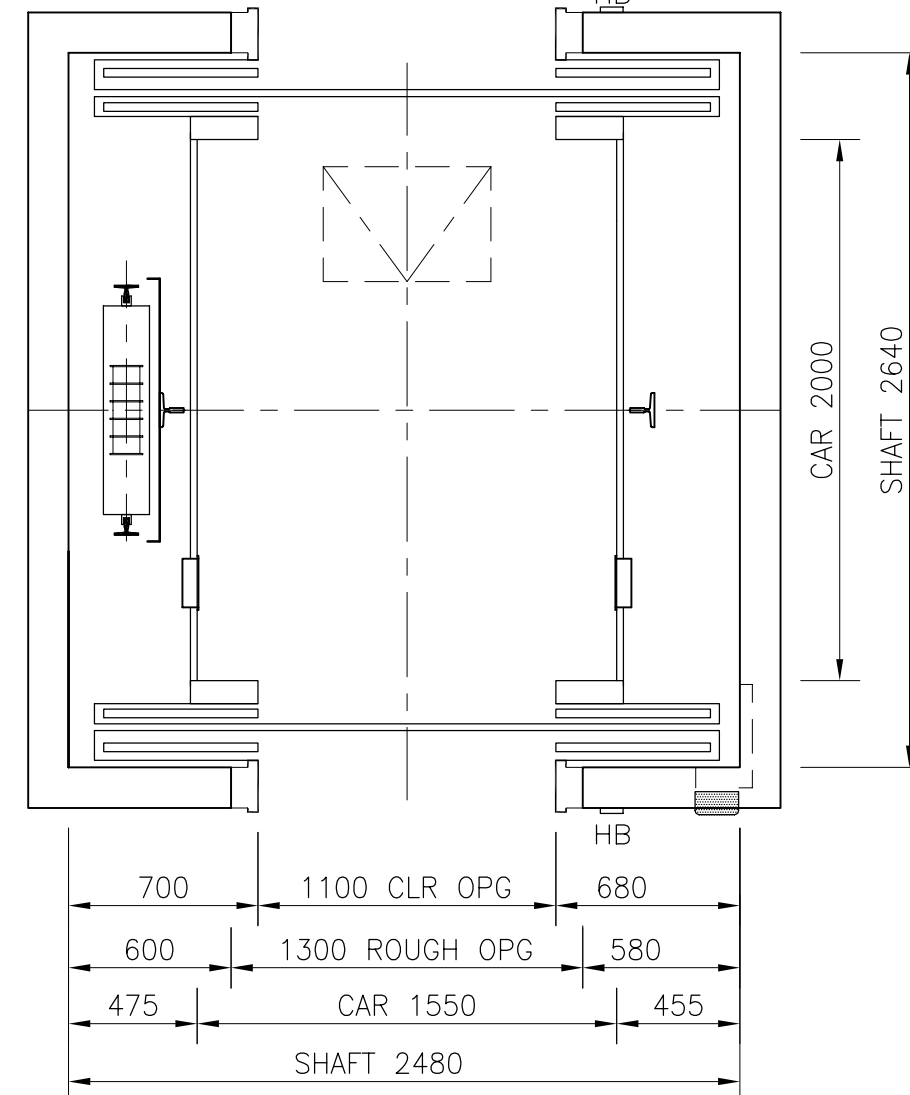


STRETCHER CAPACITY DEEP


21 PERSON 1600kg

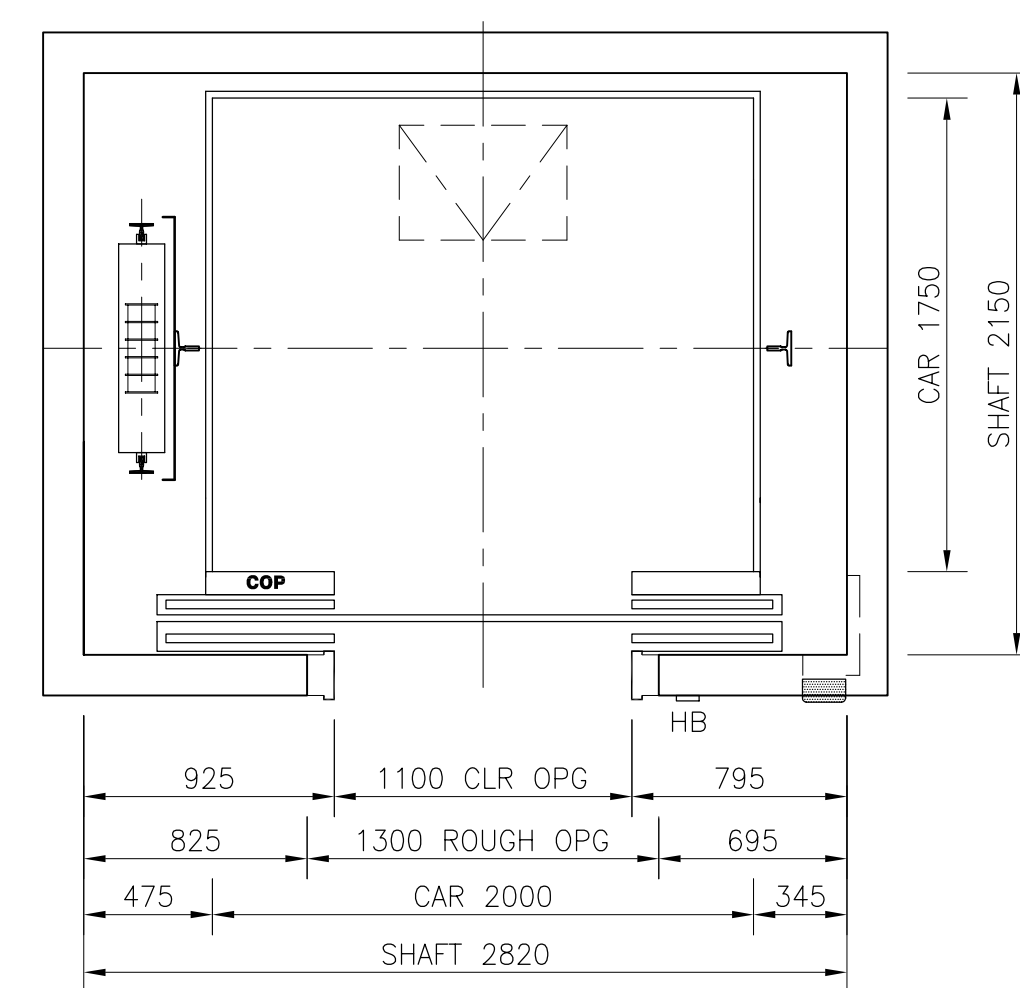


WIDE

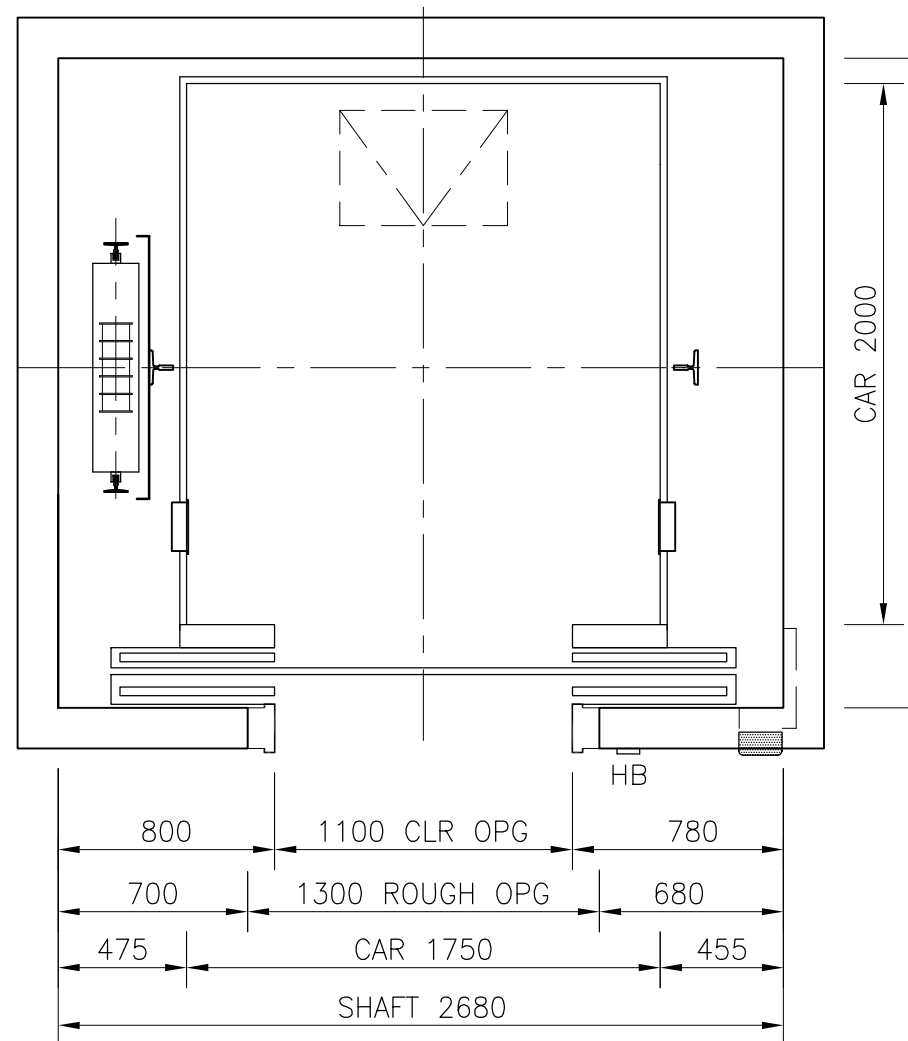

STRETCHER CAPACITY DEEP

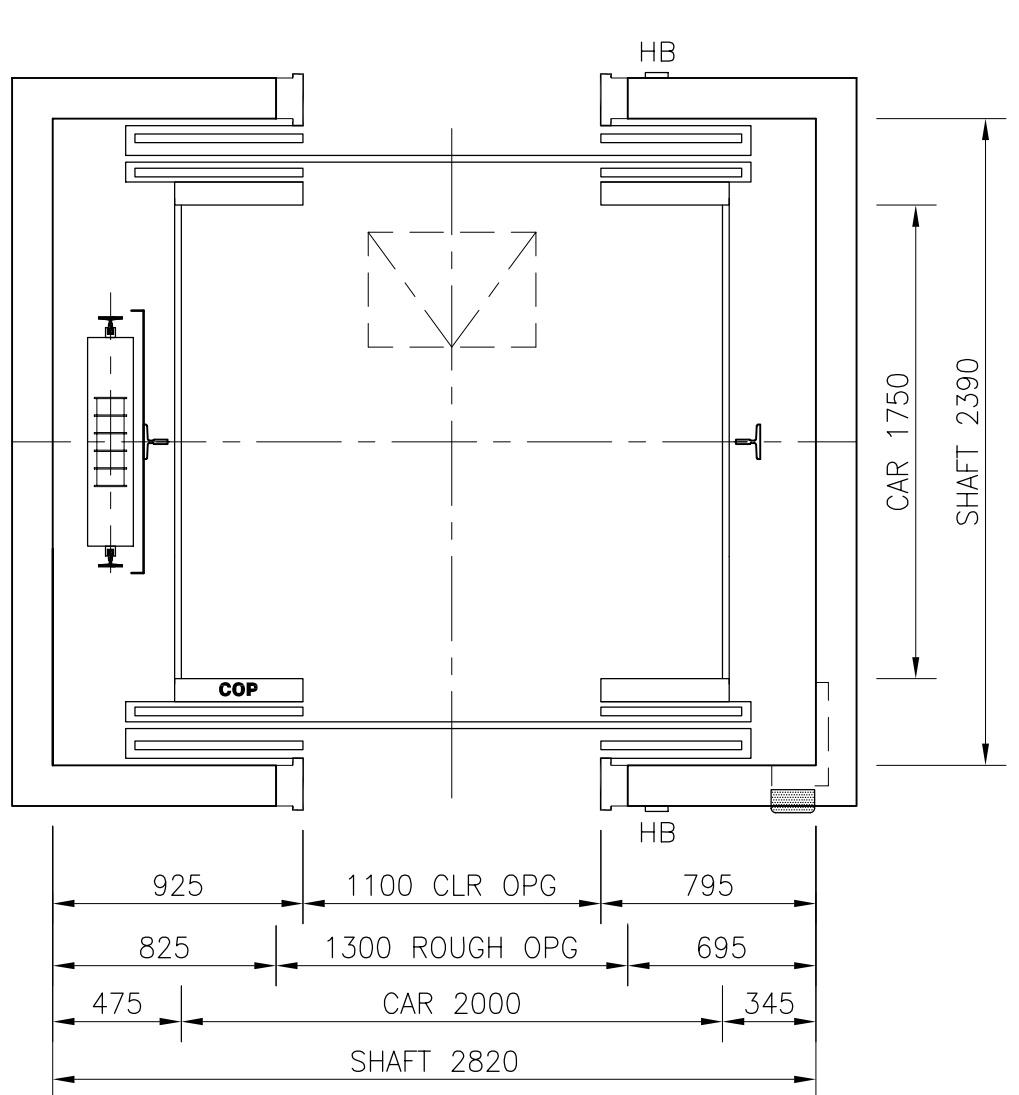

WIDE

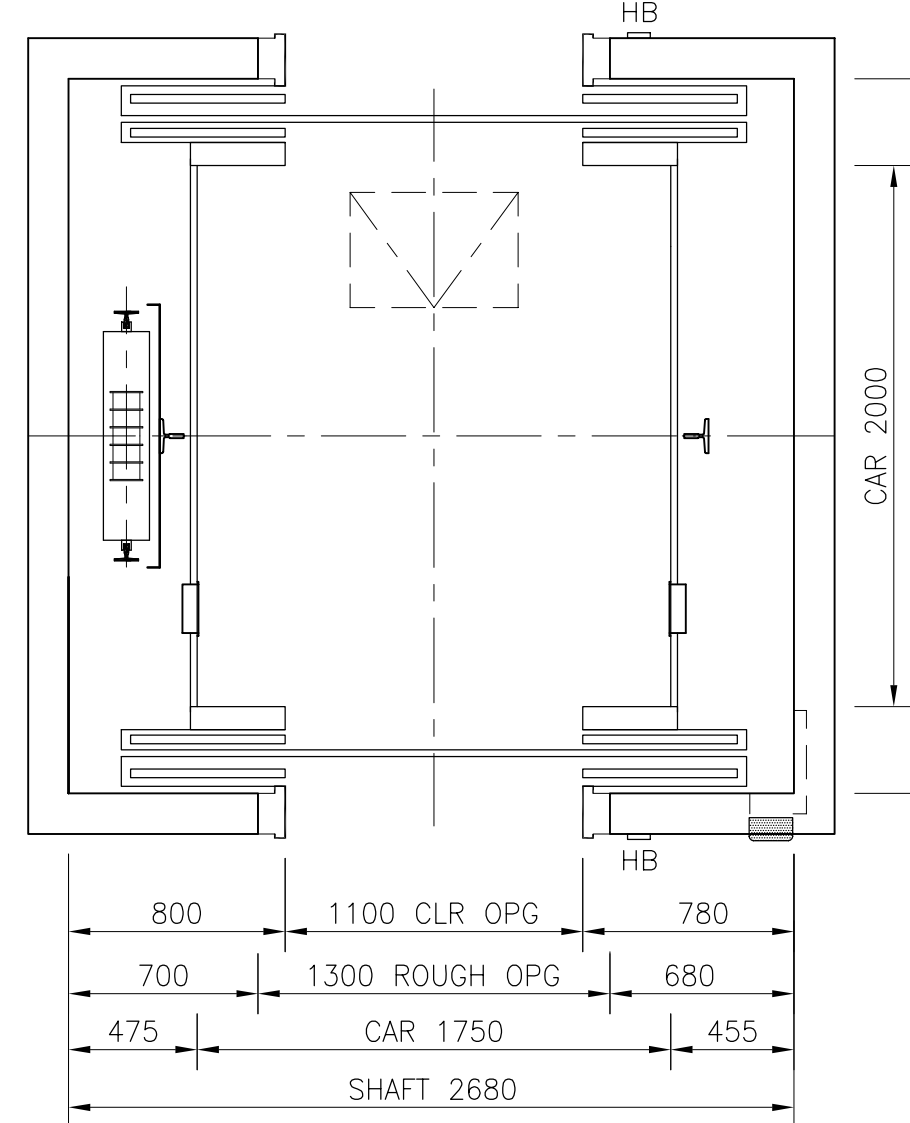

STRETCHER CAPACITY DEEP

Features


- Compact, energy efficient gearless machine
- Durable, quiet controller and drive
- Permanent magnet motor
- Highly sophisticated Remote Elevator Monitoring (REM®) controls
- Precision engineered governor
- Revolutionary coated steel belts
- Variable speed door control
- Easy access Emergency & Inspection controls

SPEED m.p.s.	1.0	1.6
HEADROOM mm	4000	4150
U/S H. Beam	3700	3850
MAX TRAVEL mm	40000	75000
MAX No STOPS	14	21
PIT without CWT Safety	1300	1450
PIT with CWT Safety	1600	1850

All through-car configurations are limited to a maximum of 16 Hoistway Entrances.
Max. No. of Hoistway Entrances per Group not to exceed 105 Entrances

Catalogue Layout

This design tool illustrates hoistway dimensions for the **Gen2™** elevator system. This is design information only – not to be used for construction purposes. Please contact Otis for full **Gen2™** layout information. Otis Elevator Company Pty Ltd has offices throughout Australia and New Zealand. www.otis.com
These dimensions assume a concrete hoistway structure. All centre opening doors. Opposite machinery location available. Two and Three car arrangements available.

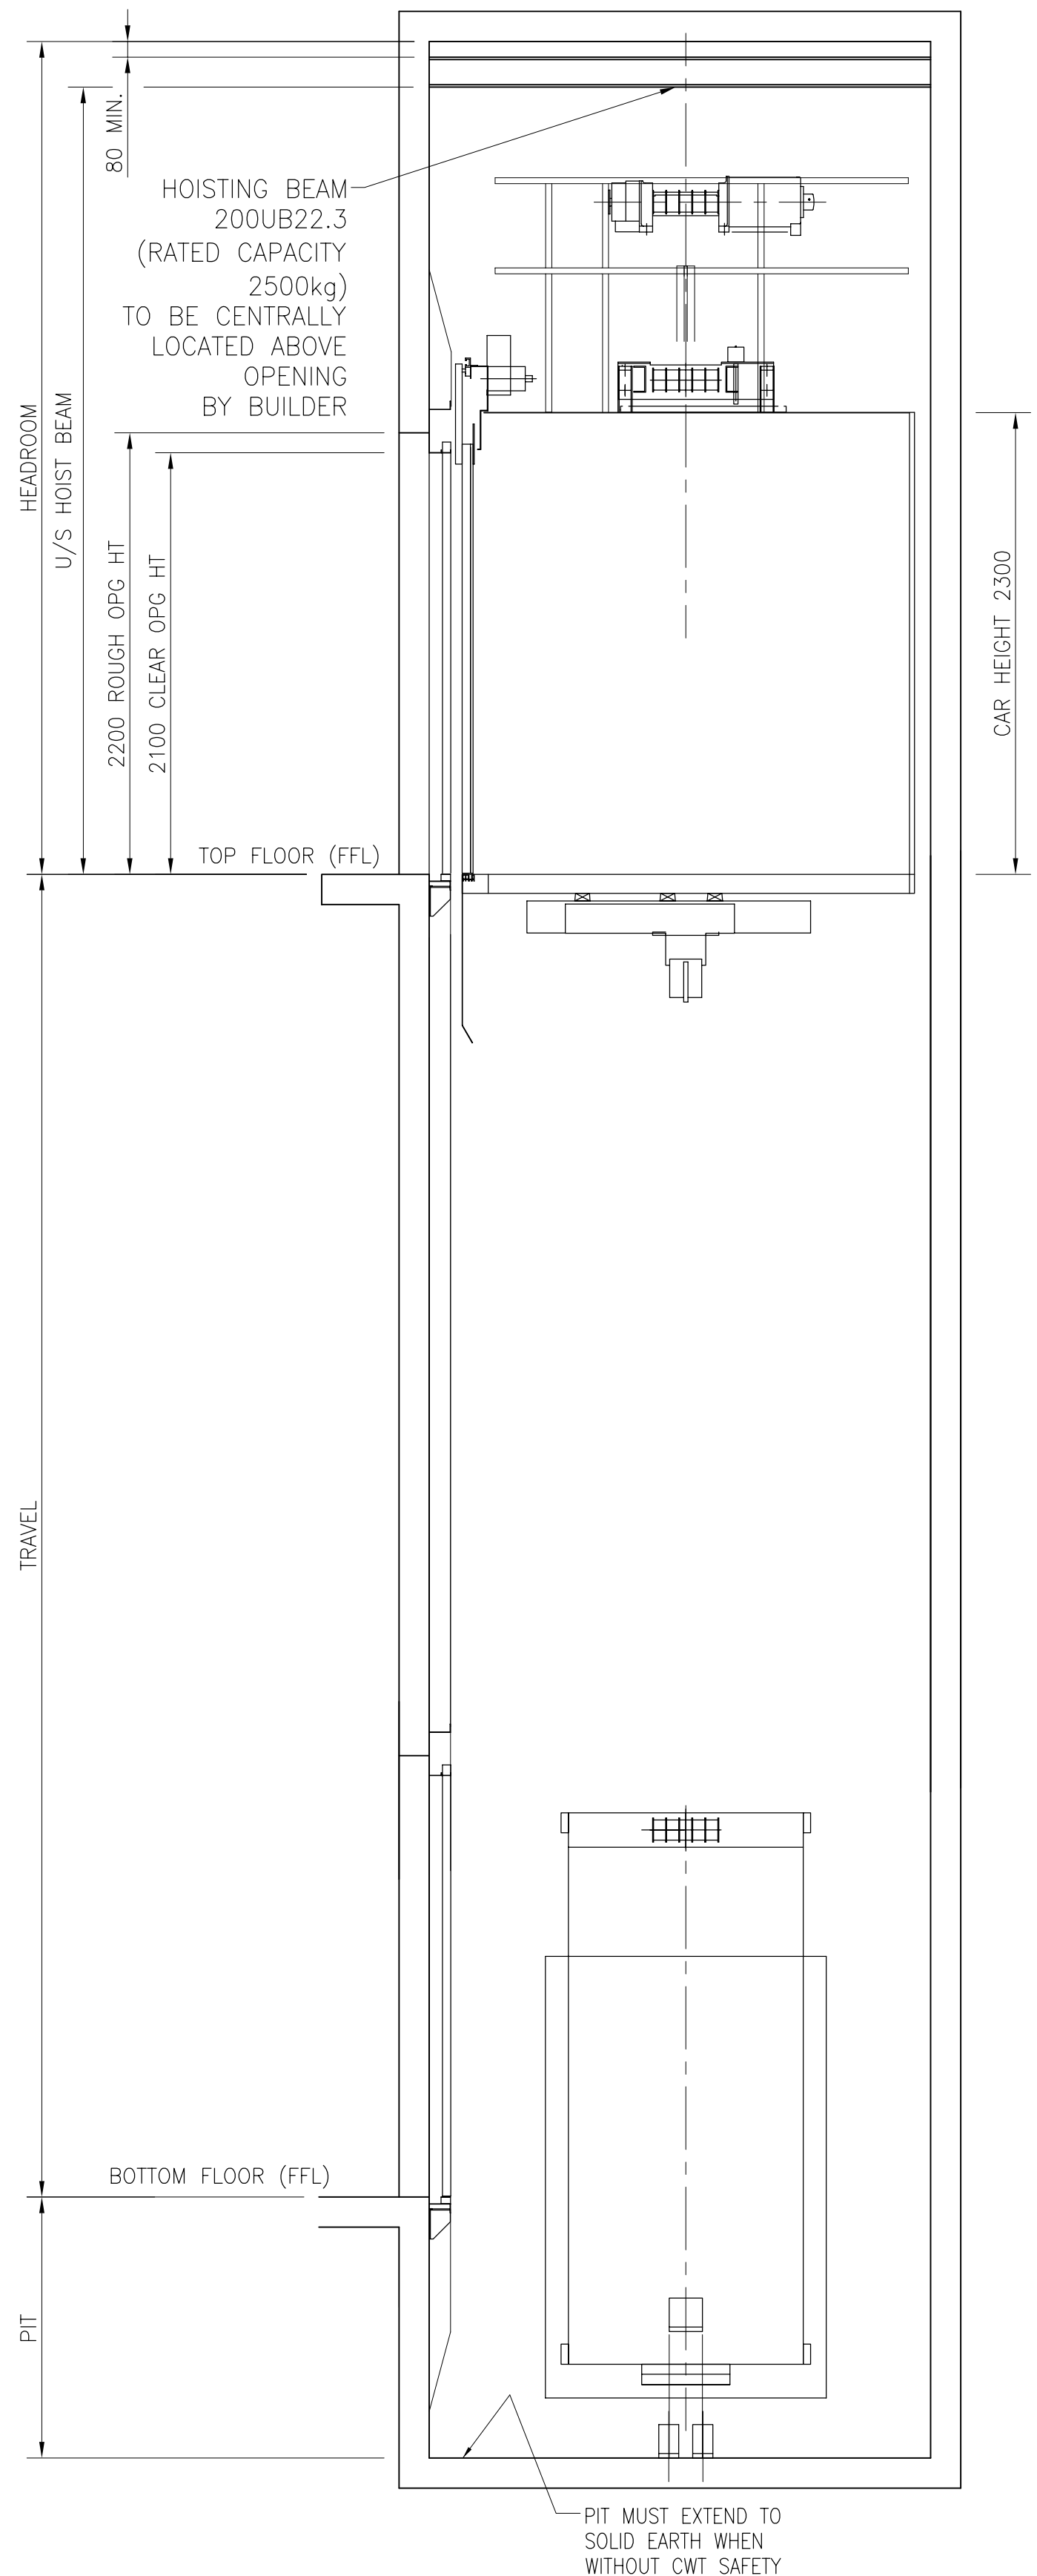

MACHINEROOMLESS
Gen2™ Premier **OTIS**
 1150 – 1600kg
 With/Without COUNTERWEIGHT SAFETY SHEET 1 OF 2
 DRG.No.L-3-CATALOGUE LAYOUT
 DATE: MAY'2005 Dwg: SAA28158BR ALL RIGHTS RESERVED

FOR ITEMS TO BE PROVIDED BY PURCHASER REFER TO SHEET 2