


Gen3 Core™ elevator



The Gen3 Core™ elevator was designed specifically for low-rise buildings, bringing passengers connectivity, style, and comfort. With standard features, the Gen3 Core helps minimize energy consumption, material usage and installation costs.

Travel height maximum	59'
Maximum stops	8
Speed (fpm)	150 (.76 m/s) – 200 (1 m/s)
Capacity (lbs)	2,100 – 5,000

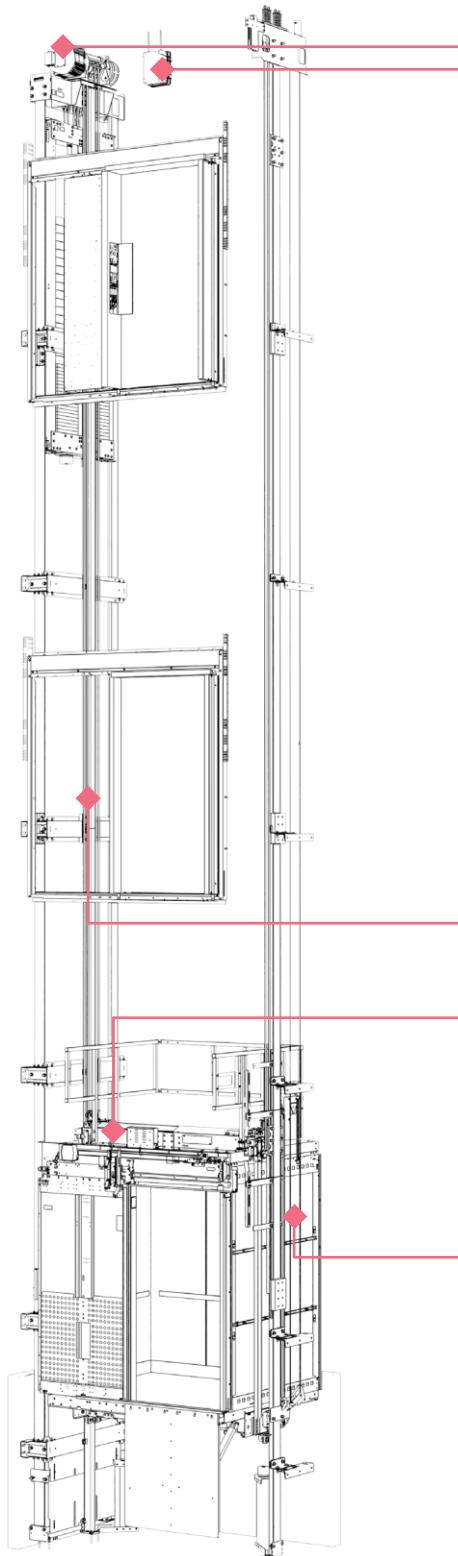

Compact gearless machine: Combined with ReGen™ drive, reduces energy consumption up to 75%.**



Otis ONE™ IoT Digital Platform: Provides the connected intelligence that defines the Gen3 elevator.



Smooth coated steel belts: Reduce noise from metal-to-metal contact of steel ropes to deliver a smooth, quiet ride.



Otis Cab Air Purifier: Significantly reduces airborne bacteria and viruses.



Efficient design: Cab, controller, and belting arrangement optimized for rapid installation.

*This model is one option for Gen3 Core™

**Compared to conventional systems without regenerative technology.

OTIS

Learn more at otis.com

© 2025 OTIS ELEVATOR COMPANY.

WHQ-NAA-1021